


Avtomatik refraktometr-keratometr-tonometr-pakimetr TONOREF III




- Avtorefraktometr, avtokeratometr, kontaktless tonometr va kontaktless pakimetrning birikmasi
- Yuqori o'lchash aniqligi
- Akkomodatsiyani o'lchash va muhitning xiraligini baholash
- Joy tejaydigan ixcham dizayn

Qanday ishlaydi

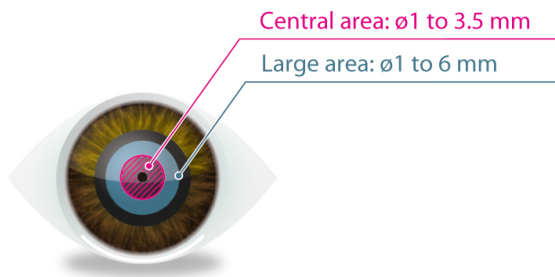


Ikki halqali keratometriya usuli — 3.3 mm va 2.4 mm diametrlarda o'lchov, qovoq shovqinini kamaytiradi.

Katta qorachiq zonasi bo'yicha tasvirlash: markaziy ($\varnothing 1-3.5$ mm) va katta ($\varnothing 1-6$ mm) zonalar taqqoslanadi.

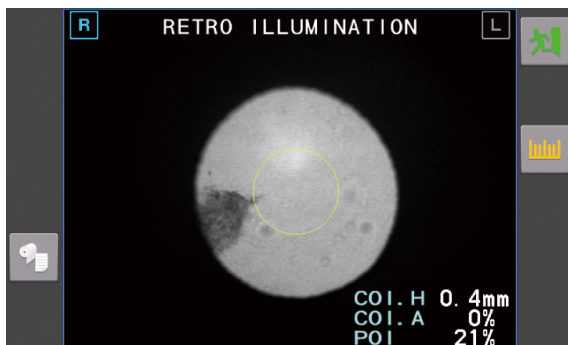

Retroyotirilgan tasvir — muhitning xiraligini (katarakta) baholash uchun NIDEK indeksleri bilan.

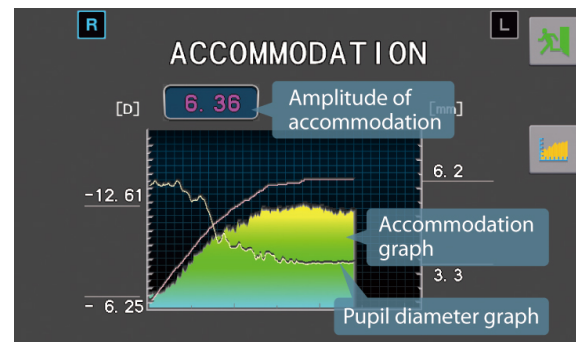

Akkomodatsiyani o'lchash grafigi — akkomodatsiya amplitudasi va qorachiq diametri bir vaqtda kuzatiladi.

Texnik xususiyatlari

Avtorefraktometr

O'lchash diapazoni	Sfera -30.00 dan +25.00 D gacha (VD = 12 mm) (0.01/0.12/0.25 D qadam); Silindr 0 dan ± 12.00 D gacha (0.01/0.12/0.25 D qadam); O'q 0 dan 180° gacha (1°/5° qadam)
Eng kichik o'lchanadigan qorachiq diametri	$\varnothing 2$ mm
O'lchash maydoni	$\varnothing 1$ dan 6 mm gacha

Fiksatsiya tasviri	Landshaft tasviri
--------------------	-------------------

Avtokeratometr

O'lchash diapazoni	Egrilik radiusi 5.00 dan 13.00 mm gacha (0.01 mm qadam); Sindirish kuchi 25.96 dan 67.50 D gacha ($n = 1.3375$) (0.01/0.12/0.25 D qadam); Silindrik kuch 0 dan ± 12.00 D gacha (0.01/0.12/0.25 D qadam); O'q 0 dan 180° gacha (1°/5° qadam)
O'lchash maydoni	$\varnothing 3.3$ mm (R = 7.7 mm), $\varnothing 2.4$ mm (R = 7.8 mm)

Kontaktsiz tonometr

O'lchash diapazoni	1 dan 60 mmHg gacha (1 mmHg qadam)
O'lchash diapazoni sozlamasi	APC40, APC60 (APC = avtomatik havo puflash nazorati), 40, 60
Ishchi masofa	11 mm
Ko'z fiksatsiyasi	Ichki fiksatsiya chirog'i

Kontaktsiz pakimetr

O'lchash diapazoni	300 dan 800 mkm gacha (1 mkm qadam)
Kornea qalinligi bo'yicha IOP tuzatish	Avtomatik hisoblash
Retroyoritilgan tasvir	Mavjud
Akkomodatsiyani o'lchash diapazoni	0 dan 10.00 D gacha (0.01/0.12/0.25 D qadam)
PD (ko'zlararo masofa) o'lchash diapazoni	30 dan 85 mm gacha (1 mm qadam); yaqin nuqta PD 28–80 mm (ishchi masofa 40 sm da)
Kornea o'lchamini o'lchash diapazoni	10.0 dan 14.0 mm gacha (0.1 mm qadam)
Qorachiq o'lchamini o'lchash diapazoni	1.0 dan 10.0 mm gacha (0.1 mm qadam)
Avtomatik kuzatish	X-Y-Z yo'nalishlari bo'yicha
Avtomatik o'lchov	Mavjud
Display	Og'diriladigan 7.0 dyuymli rangli LCD, sensorli panel
Printer	Termal chiziqli printer, qog'ozni oson joylashtirish va avtomatik kesgich bilan
Interfeys	RS-232C: 2 port, LAN: 1 port, USB: 1 port, simsiz LAN (WLAN): 1 kanal
Quvvat manbai	AC 100–240 V, 50/60 Gts
Quvvat sarfi	100 VA
O'lchamlari/massasi	260(K) x 495(Ch) x 505(B) mm / 22 kg — ARK standart rejimida; 260(K) x 495(Ch) x 460(B) mm / 22 kg — NT standart rejimida

Ishlab chiqaruvchi: NIDEK CO., LTD. (Yaponiya) — www.nidek-intl.com
To'liq katalog va narx so'rash: medkatalog.vercel.app